

BOYLER


Boiler

Ballon



Solaren Sıcak Su Depolama Tankı.
Solaren Hot Water Storage Tank.
Reservoir de Stockage Solaren.

- Fabrikada monte edilmiş termometre.
Thermometre is mounted in factory.
Le thermomètre est monté en usine.
- Flanş kapağı üzerinde elektikli ısıtıcı ekleme imkanı
Possibilité de monter l'élément électrique sur la bride.
Possibility to mount electrical heating on flange.
- Maximum çalışma basıncı : 10 bar.
Max. Working pressure : 10 bar.
Pression en service max. : 10 bar.
- Max. Çalışma sıcaklığı : 95°C.
Max. Working temperature : 95°C.
Temperature max. en service : 95°C.

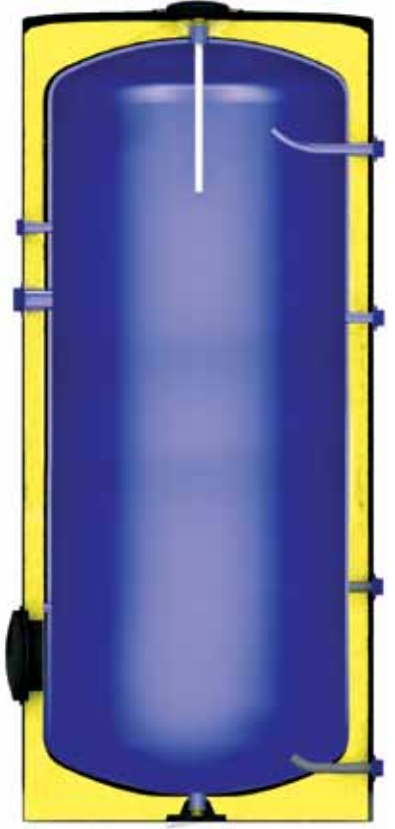

MODEL		750	1000	1500	2000
Capacity	litres	750	1000	1500	2000
Diameter	Ø D mm	880	1000	1150	1220
Height	H mm	2020	2020	2150	2290
Weight	kg	219	250	392	479
Hot water outlet HW	R	1 ¼	1 ¼	1 ¼	1 ¼
	h6 mm	1700	1655	1750	1820
Cold water inlet CW	R	1 ¼	1 ¼	1 ¼	1 ¼
	h1 mm	120	120	165	165
Circulation	R	¾	¾	¾	¾
	h4 mm	550	800	800	800
Flange	h7 mm	360	400	400	450
	F mm	155	155	155	155
Heating capacity	kW	83	102	115	166

